



PO520G3


CAPACITY:	5200 kg
POWER SUPPLY:	400V/50Hz
AIR SUPPLY:	6-8 bar max.
MOTOR POWER:	2,2kW
LIFTING HEIGHT:	1896 mm
CLEARANCE:	3000 mm
PLATFORMS:	490x5190 mm
NOISE LEVEL:	<70 dB (A)
WEIGHT:	1350 kg

Electrohydraulic lift for wheel alignment s platforms with space for turntables and discharge plates s mechanical height lock pneumatically released s adjustable position of one of the platforms s perfectly protected hydraulic cylinder s galvanized rigging due to pre-tension slarge pulleys diameter s the elevator blockage in the event of loosening or breaking of rigging s control of the hoist with safe 24V voltage s safety device in accordance with EN1493: 2010.


OPTIONAL EQUIPMENT



XT300P AXLE JACK 2T WITH PNEUMATIC HUDRAULIC PUMP

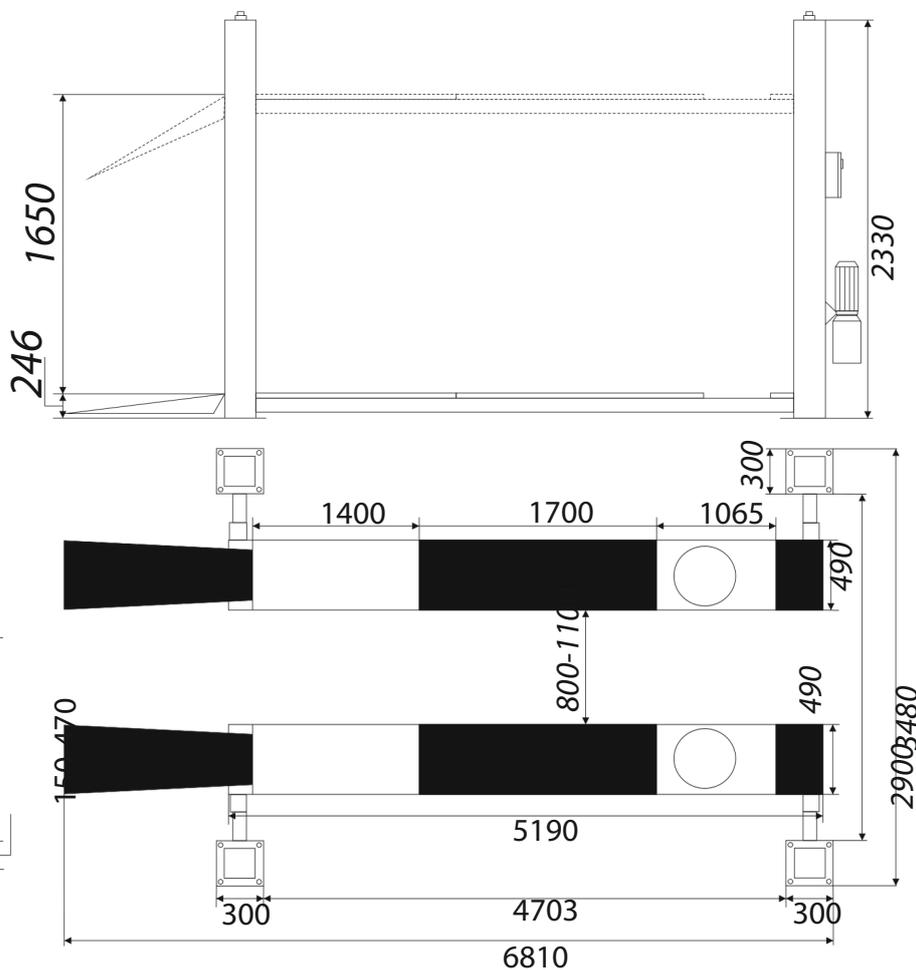

PO520G3

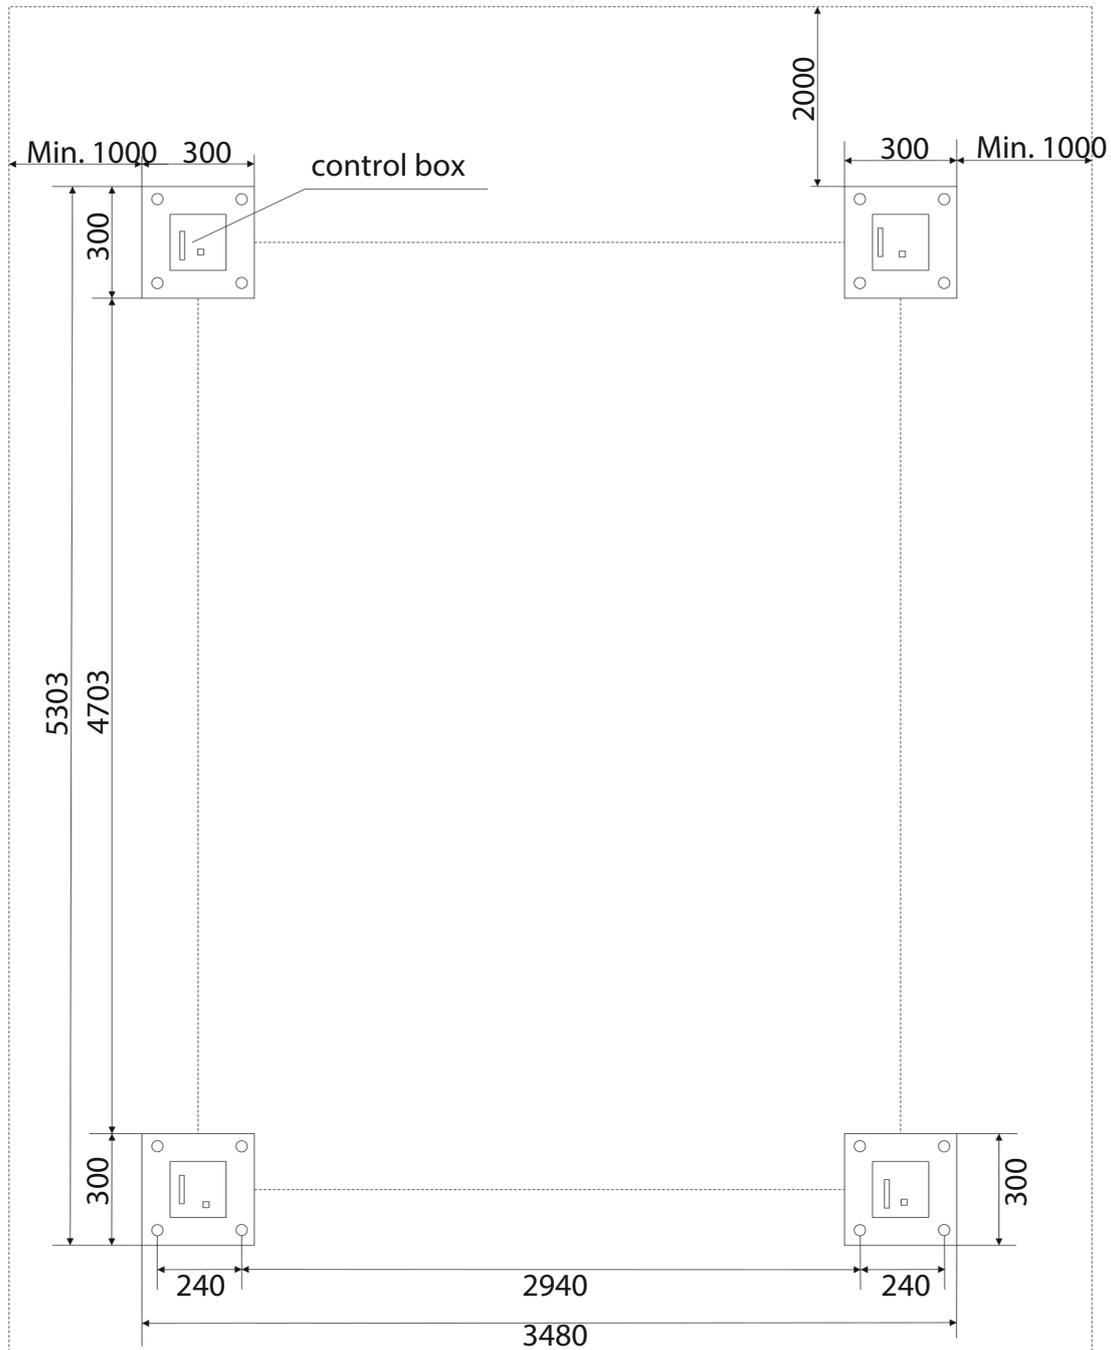

INSTALLATION REQUIERMENTS



Concrete class: B25 or C20 / 25 with a minimum installation area: 5803x3960x300 mm s Acceptable floor imbalance: +/- 5mm
floor finish: 3 weeks before assembly s Mounting anchors: mechanical M12 / 150 mm 16 pieces or chemical M16 / 250mm
Hydraulic oil: HL22, 18.0l s Electricity supply: 5x 2.5mm cable connected to the mounting location s Pneumatic supply:
dried and lubricated air, min. 6 bar (max. 8 bar) Current protection: min. 32A with 3-phase 400V / 50Hz power supply.

Assembly allowed only in closed areas s prohibition of using reinforcement 20 cm from the top thicker than 4mm² s assembly for
chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) s All connections, with
particular reference to electrical connections, they must be made by authorized persons s The installation must remain carried out by
qualified personnel according to the rules attached in this building plan s In the case of assembly by Nortec or its authorized service
center, the lift must be on solid ground.