


PD5500





CAPACITY:	5500 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	2,6 kW
LIFTING HEIGHT:	1900 mm
CLEARANCE:	3300 mm
3-STAGE ARMS:	890-1800 mm
OIL PRESSURE:	20 MPa
NOISE LEVEL:	<75 dB
WEIGHT:	850 kg
SIZE OF THE PACKAGE:	60x320x140 cm

Electrohydraulic lift with mechanical synchronization at floor level, electromagnetic height lock, automatic arm lock during lifting, set of door protection, 180mm adapters in standard, safe 24V voltage control, extreme and safe sensors, trolley positions, hydraulic safety device in the event of sudden oil leakage or overload.

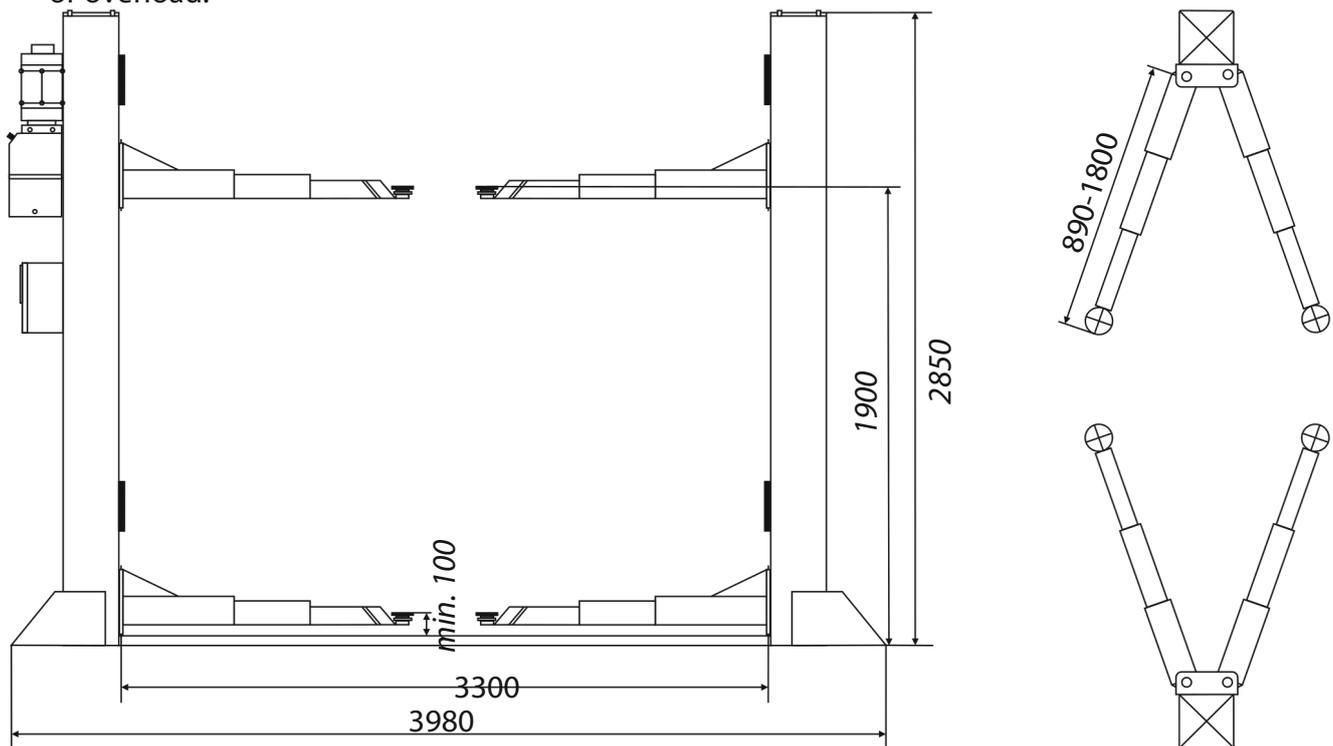

PD5500

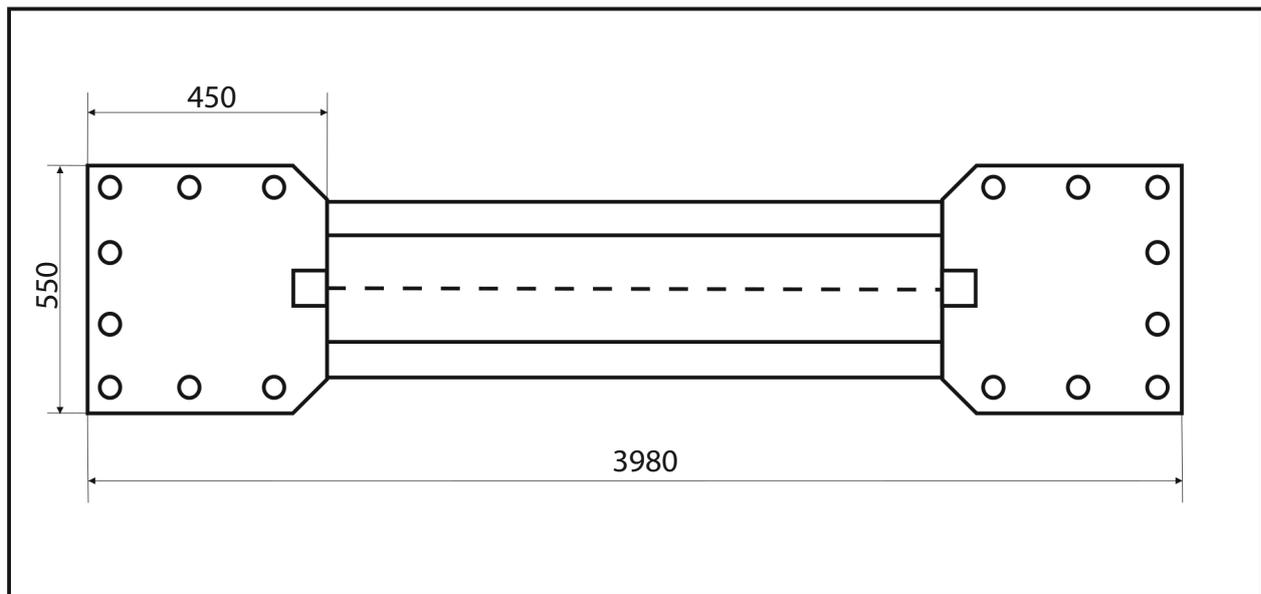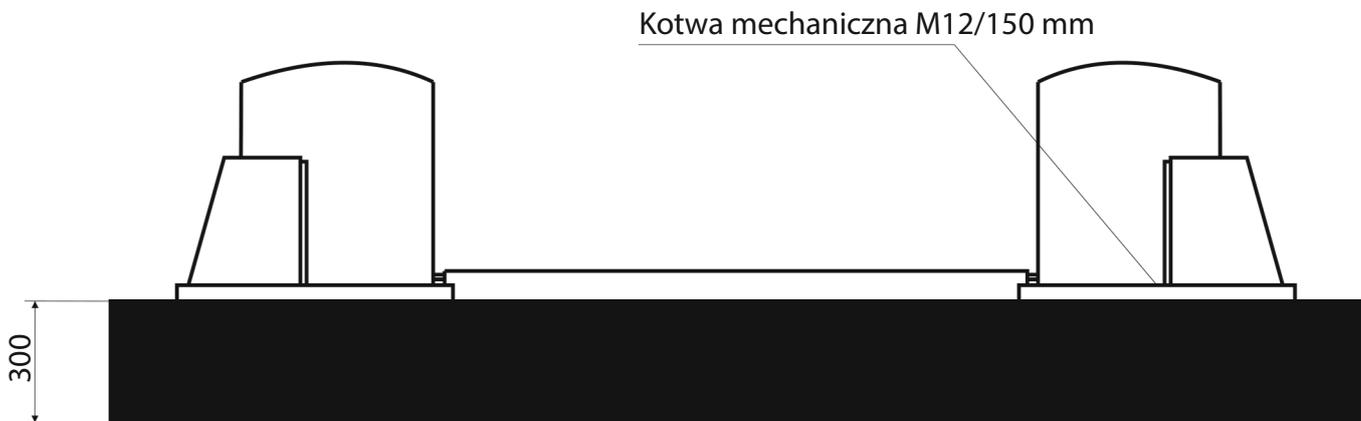

WYMIARY POSADZKI: 4500x1500mm

INSTALLATION REQUIREMENTS:

Concrete class: B25 or C20 / 25 with a minimum mounting area: 4150x1500x300mm s Acceptable floor imbalance: +/- 5mm, floor execution: 3 weeks before assembly s Mounting anchors: mechanical M12 / 150 mm 16 pieces or chemical M16 / 250mm s Hydraulic oil: HL22, 10.0l s Power supply: 5x2.5mm cable to the place of assembly s Current protection: min. 32A with 3-phase 400V / 50Hz power supply.



Installation allowed only in closed areas s prohibition of using reinforcement 20 cm from the top thicker than 4mm² s assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) s All connections, with particular reference to electrical connections, they must be made by authorized persons s The installation must remain carried out by qualified personnel according to the rules attached in this building plan s In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.