



# PD4000C


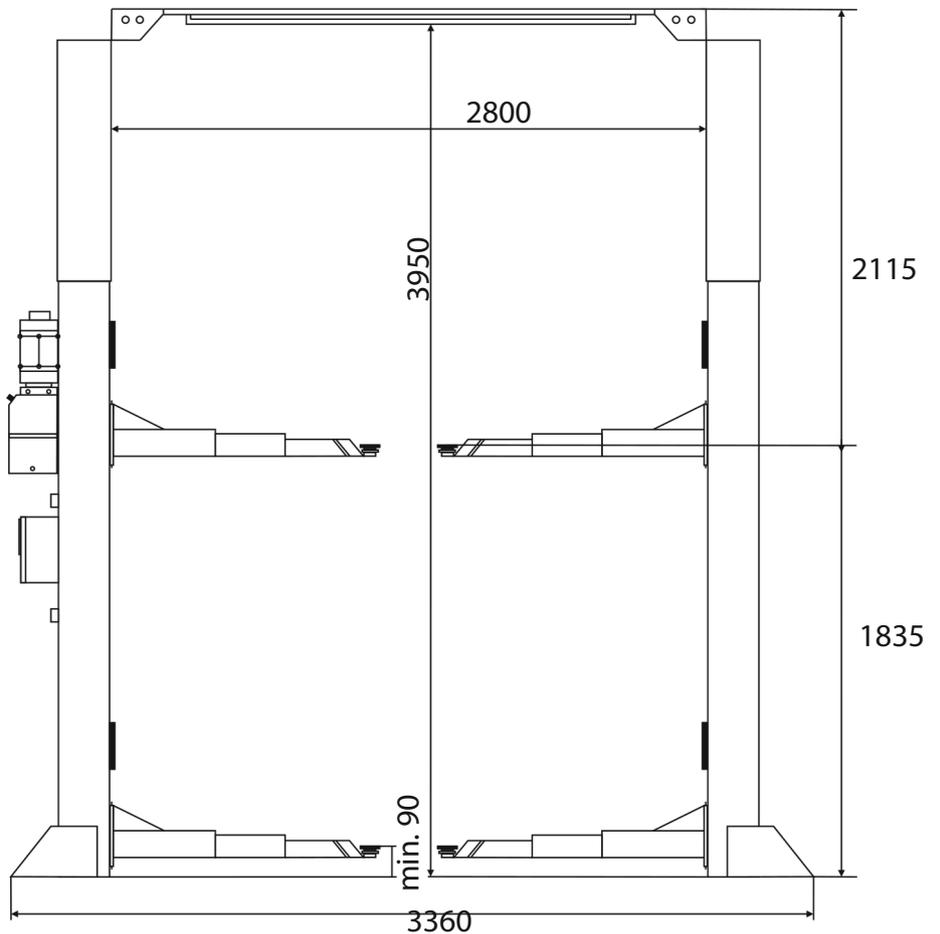


CAPACITY:	4000 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	2,2 kW
LIFTING HEIGHT:	90 - 1835 mm
MACHINE HEIGHT:	3950 mm
CLEARANCE:	2800 mm
3-STAGE ARMS:	712 - 1051 mm
3-STAGE ARMS:	793 - 1500 mm
OIL PRESSURE:	16 MPa
NOISE LEVEL:	<80 dB

Baseless electrohydraulic 2 post lift s  
 Mechanical synchronization s  
 electromagnetic height lock s automatic arm  
 lock during lifting s set of door protection.

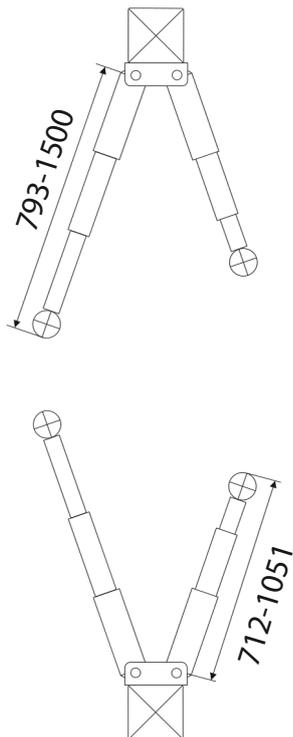

# PD4000C

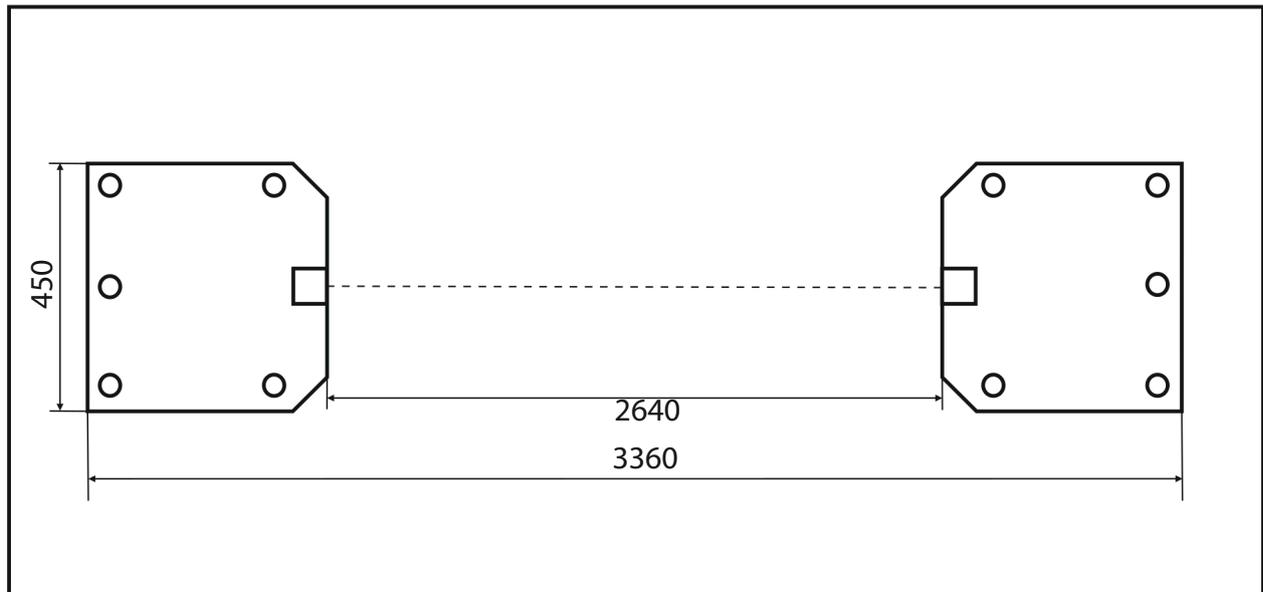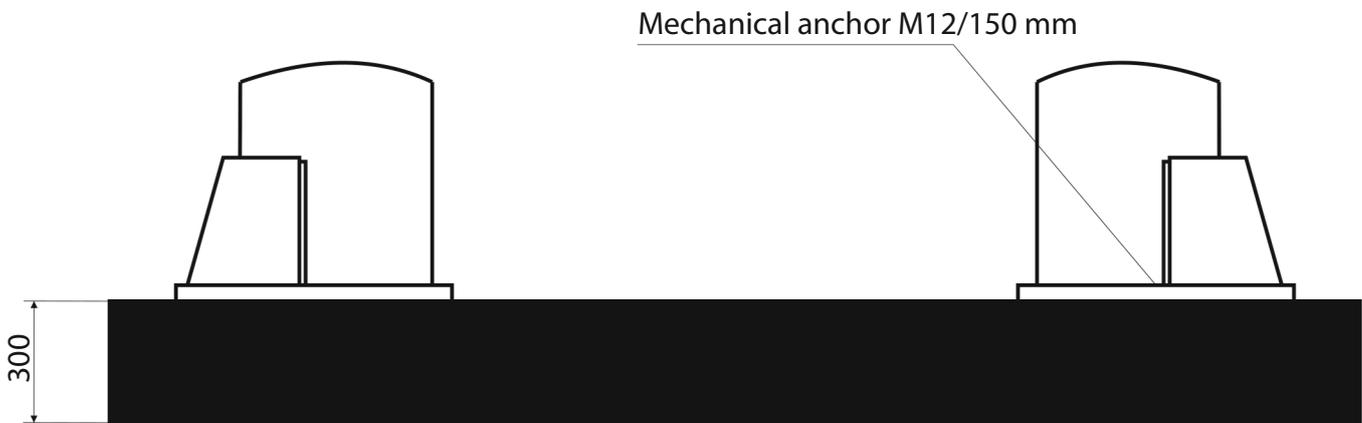

FLOOR DIMENSIONS: 4000x1500mm

## INSTALLATION REQUIREMENTS:

Concrete class: B25 or C20 / 25 with a minimum mounting area: 4000x1500x300mm s Acceptable floor  
floor execution: 3 weeks before assembly s Mounting anchors: mechanical M12 / 150 mm 10 pieces or c  
s Hydraulic oil: HL22, 10.0l s Power supply: 5x2.5mm cable to the place of assembly s Current protec  
3-phase 400V / 50Hz power supply.



Installation allowed only in closed areas s prohibition of using reinforcement 20 cm from the top thicke  
for chemical anchors for an additional fee (submit in advance, preferably when setting the date of asse  
with particular reference to electrical connections, they must be made by authorized persons s The in  
carried out by qualified personnel according to the rules attached in this building plan s In the case of a  
by Nortec or its authorized service center, the lift must be on solid ground.