

Nortec-Pro EVO DUAL

NEW



TECHNICAL DATA

Vacuum pump	100 l/min 2x 300 gr/min
Compressor capacity	R134a and HFO1234yf 2x
Factor handling (type)	10,5 kg
Tank capacity	scaled (dosing by oil scales)
Oil/additive standard injection	scales
Oil tanks	3 (new oil, used, contrast)
Automatic valves	No
Graphic display with icons	4,7" Monochrome
Multilingual software	Yes
Hoses	3m (optional max. 9m)
Database and graphics upgrade of via USB	Yes (Free)
Printer	in standard
HP/LP gauges class 1,	Class 1 with working pressure
Tank's pressure gauge	2 included
Moisture filter	Yes
Facilitated charge in each temperature condition with BST system	BST System
Built-in database (cars, industrial vehicles, agricultural machines)	Yes
Leakage test with nitrogen (with kit 01.000.218 on request)	Yes (optional)
Gas analyzer HFO1234YF set up (with kit on request)	Yes (optional)
Dimensions, cm	50x58,5x113 cm
Weight, kg	100 kg



HIGH CLASS CONNECTORS



OIL TANKS AS STANDARD



CLEAR CONTROL PANEL




PRINTER IN STANDARD



BUILT-IN BRAKE





LARGE WHEELS FOR EASY DRIVING





Multi-language menu!
Simple and intuitive operation
Internal rinsing of the device!
(option for hybrids)

Possibility to create customer databases, detailed printout after the end of the vehicle service process.

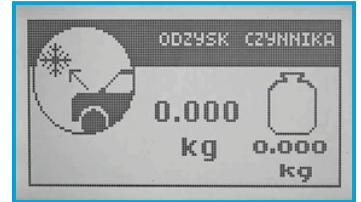


The **BST system** allows you to recharge the refrigerant in vehicle air-conditioning systems with the compressor located in the air conditioning station. **It replaces the heating belt** and increases the accuracy recovering gas from the vehicle system by sucking above the minimum pressure.

Extensive vehicle database (passenger, truck and agricultural) with **FREE UPDATE!** You can enter your own custom vehicles into the database. Service of **HYBRID** vehicles.




HANDLE HOSE FIXING

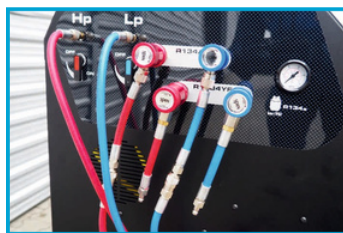

DOUBLE CONNECTOR SYSTEM R134a AND HFO1234yf

STANDARD HOSES WITH A LENGTH OF 3 METERS (OPTIONAL EXTENSION POSSIBILITY UP TO 9 METERS)



HOSES ON QUICK-CONNECTORS



OVERVOLTAGE LIMITER



TANK GAUGE R134a and HFO1234yf