





T5681

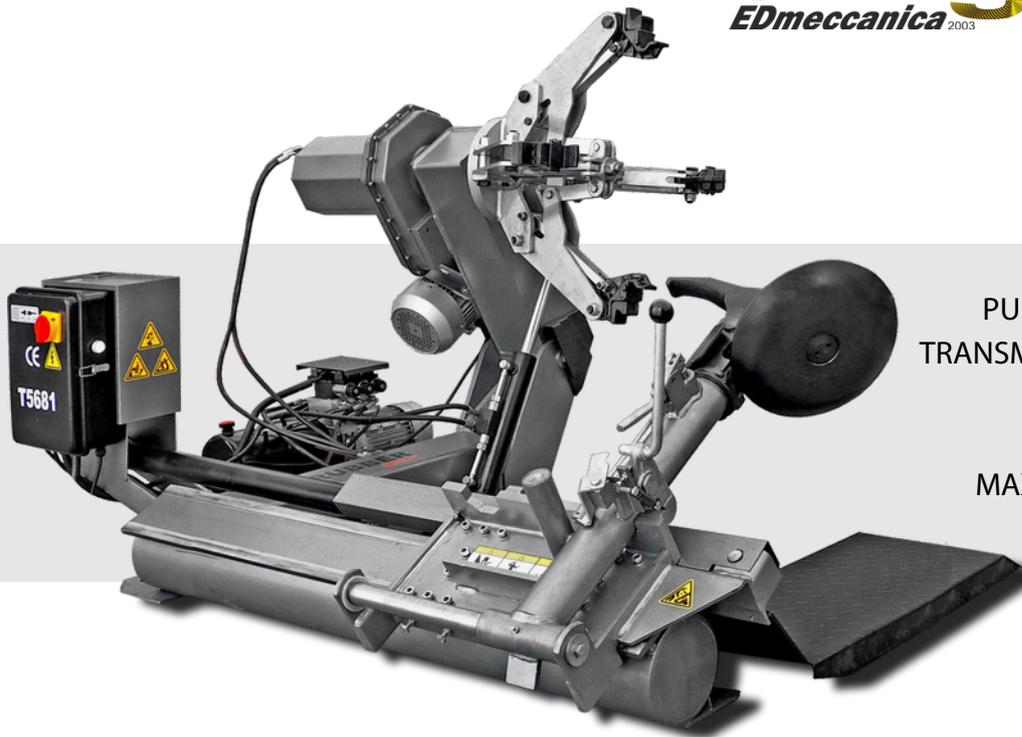

POWER SUPPLY:	400V/50Hz
PUMP MOTOR POWER:	1,5 kW 1,8 kW
TRANSMISSION ENGINE POWER:	14" - 26"
RIM DIAMETER:	780 mm
RIM WIDTH:	1600 mm
MAX. WHEEL DIAMETER:	570 kg
WEIGHT:	< 70 dBA
NOISE LEVEL:	

Designed for mounting and dismounting of tubeless and tubed tires s For car wheels trucks, buses, agricultural and construction machinery s Plate breaker and claw placed on rotary head for quick tool change s Specially profiled impact plate allows for efficient disassembly of the tire without risk of damage s Mobile platform for fast and precise wheel alignment s Safe control voltage (24V) eliminates the risk of electric shock electric shock s Rich standard equipment

STANDARD EQUIPMENT

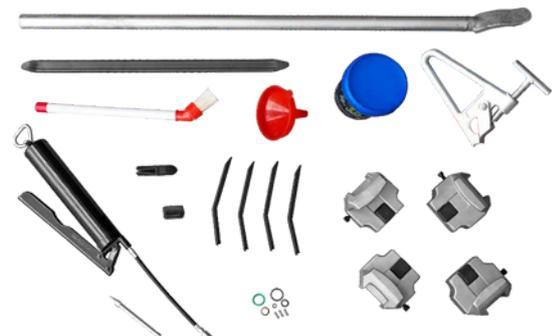

CONTROL BOX



CONTROL REMOTE



JAWS



PLATE AND BEAD BREAKER